# CN445RZ

drives 3/4" to 1-3/4"coil nails

## **FEATURES**




Rapid fire trigger valve CN445R2 comes with a rapid trigger valve. The CN445R2 is the fastest roofer on the market with little recoil.

Tar resistant nose (Patent pending)

The nose of the CN445R2 is designed to resist tar four times longer thanconventional tools.







Powerful

Excellent for hard dried-out wood, metal valleys and re-roofing through several layers of shingles.

Removable contact foot Easy to remove and clean, inexpensive to replace.



Nose magnet

Holds the last nail of the coil, preventing waste and jamming.



# **APPLICATIONS**

- Asphalt shingles
  Siding
  Box assembly
- Metal to plywood

# **TOOL SPECIFICATIONS**

Ī	MODEL	CN445R2
	WEIGHT	5.2 lbs
Γ	DIMENSIONS	10-1/2"(H) × 4-1/2"(W) × 12-3/16"(L)
Ī	LOAD CAPACITY	120 nails
ſ	OPERATING PRESSURE	70-100 psi (Regulator)
ſ	AIR CONSUMPTION	0.047ft <sup>3</sup> / cycle (90psi operating pressure)

Only

**5.2** lbs

Full round driver blade



Dial adjustable depth control

Dial depth control requires no special tools, providing accurate depth control the softest

shingle to the hardest wood. No need to make any adjustments at the compressor.




- Comfortable rubber grip
- Trigger lock for safety

Maintenance free end cap filter (US Patent 5637125)

It prevents foreign substances from entering the tool. Internal parts last longer and the inside of the tool is kept clean. The filter has a self-cleaning feature; foreign substances are ejected automatically from the tool when








Optional parts



- Vinyl Siding Kit (CN70433) Sequential Trigger Kit (CN80535)
  - Anti-Double Fire Trigger Kit (CN81159)

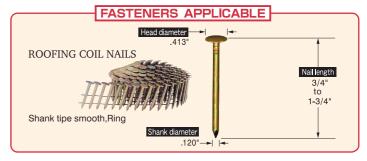

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



# MAX USA CORP.